


51930-0006-00

REVISION HISTORY

REV	DA-MO-YR	E. C. O. / APPR.	NOTES
-	18-08-14	PLM	FIRST RELEASE

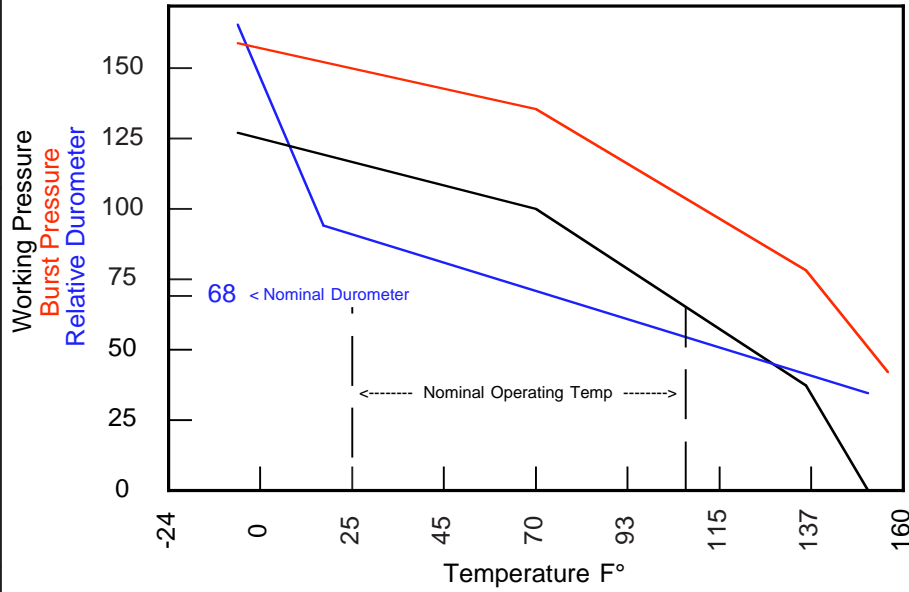

**General Specifications**

MATERIAL: POLYVINYL-CHLORIDE  
 COLOR: > See Table Below  
 MAX. OPERATING PRESSURE: > See Chart Left  
 BURST PRESSURE: > See Chart Left  
 Outside Diameter, O.D.: > See Table Below  
 Inside Diameter, I.D.: > See Table Below  
 MIN. BENDING RADIUS: > See Table Below  
 TEMP RANGE: > See Chart Left  
 LENGTH & PACKAGE: By the Foot or 20' or 30' Roll



PVC Tubing

Li	MH Item Number	O.D	I.D	COLOR	Durometer	Min. Bend Radius
1	00HDW-0042-00	(0.281) 7.15 mm	(0.156) 3.97 mm	CLR	68 @ 70° F	(0.590) 15mm
2	00HDW-0044-00	(0.250) 6.35 mm	(0.125) 3.175 mm	CLR	68 @ 70° F	(0.590) 15mm

UNLESS OTHERWISE SPECIFIED DIMS ARE IN INCHES. TOLERANCES ARE:

0.X	±0.015	ANGLES	FRACTIONS	63/	THIRD ANGLE PROJECTION.	<CR> KEY CHARACTERISTICS <MA> PER CORP. DOC: ESR-001 MOUNTAIN HIGH E&S CO. REDMOND, OR. USA	NO.
0.XX	±0.010	± 0.5°	± 1/64				
0.XXX	±0.005						

INTERPRET GD&T DIMS AND TOLS PER ASME 14.5

ISSUED:	04-26-00	LP PVC TUBING, SCD
DRAWN:	PLM	04-26-96
ENGINEER:	DATE	DWG. #: E-930006
APPR:	DATE	REV -

SIZE A SHEET 1 OF 1 DO NOT SCALE DRAWING