


51930-0001-00

Burst Pressure Characteristics Curve

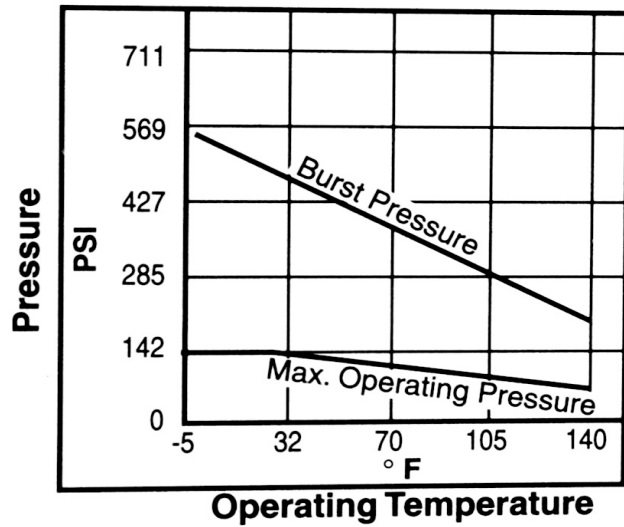

1 2 3 4 5 6


Polyurethane Tubing

REVISION HISTORY

REV	DA-MO-YR	E. C. O. / APPR.	NOTES
A	04-07-00	PLM	CHANGED TO NEW FORMAT & ADDRESS
B	04-17-13	PLM	ADDED IMAGES

General Specifications

MATERIAL: POLYURETHANE
COLOR: > See Table
MAX. OPERATING PRESSURE: > See Chart
BURST PRESSURE: > See Chart
Outside Diameter, O.D.: > See Table
Inside Diameter, I.D.: > See Table
MIN. BENDING RADIUS: > See Table
TEMP RANGE: > See Chart
LENGTH & PACKAGE: By the Foot or 20 or 30' Roll

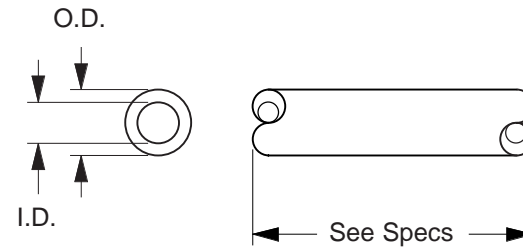

Li	MH Item Number	O.D	I.D	COLOR	Min. Bend Radius
1	19600-0009-00	(0.250) 6.35mm	(0.125) 3.2mm	CLR	(0.590) 15mm
2	19600-0003-00	(0.236) 6.0mm	(0.157) 4mm	CLR Blue	(0.590) 15mm
3	19600-0002-00	(0.157) 4mm	(0.098) 2.5mm	CLR Red	(0.394) 10mm
4	19600-0005-00	(0.125) 3.2mm	(0.079) 2mm	Yellow	(0.394) 10mm
5	19600-0007-00	(0.125) 3.2mm	(0.079) 2mm	Slate	(0.394) 10mm
6	19600-0006-00	(0.125) 3.2mm	(0.079) 2mm	Orange	(0.394) 10mm


UNLESS OTHERWISE SPECIFIED DIMS ARE IN INCHES. TOLERANCES ARE:

0.X ±0.015 ANGLES ±0.5° FRACTIONS ± 1/64
 0.XX ±0.010
 0.XXX ±0.005

63/

INTERPRET GD&T DIMS AND TOLS PER ASME 14.5

THIRD ANGLE PROJECTION.



<CR> KEY CHARACTERISTICS NO.
 <MA> PER CORP. DOC: ESR-001

MH MOUNTAIN HIGH E&S CO. REDMOND, OR. USA

ISSUED:	04-26-00	LP POLYURETHANE TUBING, SCD
DRAWN:	PLM 04-26-96	DWG. #: E-930005
ENGINEER:	DATE	REV A
APPR:	DATE	SIZE A SHEET 1 OF 1 DO NOT SCALE DRAWING